



Entry-Level Application Server

Supports Intel® S845WD1-E Board
High Density Rackmount Chassis
Three-Year Limited Warranty

19" 1U Rack mount Design


Rack optimized, high-density server platform solution
Easy deployment environment
Enables up to 42 servers to be racked in a 42U cabinet

System Cooling

Fans - Three (3) long life ball bearing fans
Heatsink included with Intel® S845WD1-E boxed board

Specifications

Space-saving (1.7" x 19" x 19") 1U rack configuration.
Specifically designed and validated with Intel® S845WD1-E Server Board
One 5.25" Standard Bay
One 3.5" Fixed Bay
One 3.5" Opened Bay

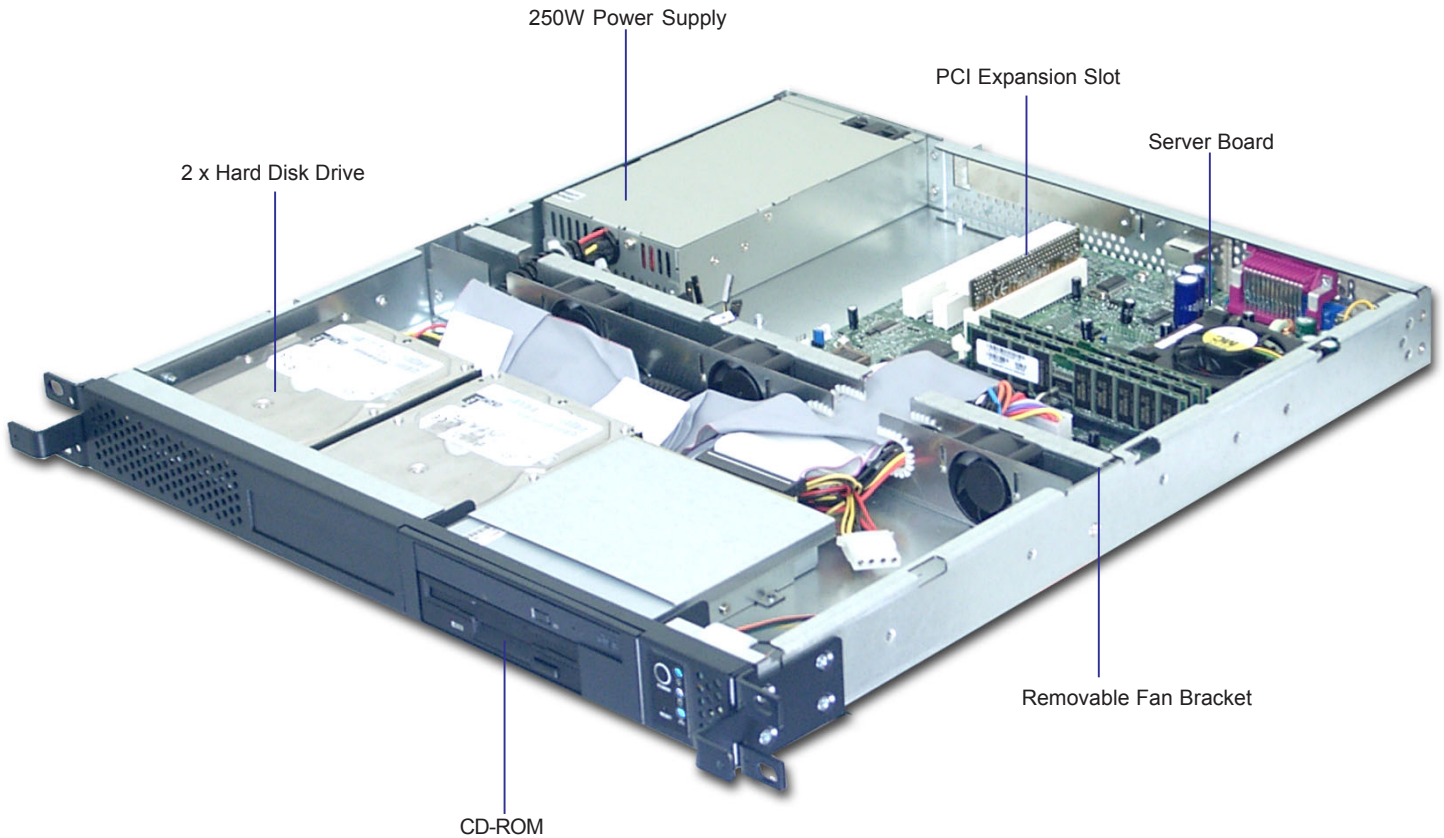

(Processor, Server Board, CD-Rom, FDD, Combo Kit and HDDs are not included)

Specification	
Model No.	RS 1202 19" Rack Mount
Dimensions	43.7mm(H) x 482.6mm(W) x 482.6mm(D); 1.721"(H) x 19" (W) x 19"(D)
Server Board	One ATX Server Board; Up to 12" x 9"
Peripheral Bays	One CD-Rom Bay, one standard 3.5" Bay, and one opened 3.5" Bay
Expansion slots	One 32bit PCI riser card
Thermal solution	Special-designed heat sink included w/ S845WD1-E boxed Server Board
Power Supply	One Standard 250W power supply
Front Panel LED Indicators	1. Power ON/OFF power switch 2. Reset Switch 3. Power ON LED (Green) 4. HDD status LED (Green) 5. LAN LED (Green)
Environment	Ambient Temperature Operating: 5°C to 35 °C Non-operating Storage: -40°C to 70°C Relative humidity Non-operating---95% @ 30°C non-condensing

Order Information and Options	
Model No	Description
09-1737-03A	RS 1202 19" Chassis
09-2546-01	Combo Drv Kit Slimline 5.25" / Standard 3.5" Bay
09-3856-01	Face Plate, Perforated
04-3214-01	Flat Cable, IDE, ATA 100, 40P/40P

Specifications and Features are subject to change without notice. Pictures provided here are for illustration only, subject to change without notice