



PART REV.	DWG. REV.	ECO#	ZONE	DESCRIPTION OF CHANGE	REV. BY	APPD	DATE
A	A			CREATE FOR RFA J25	WENDY	DAVID	11-08-17

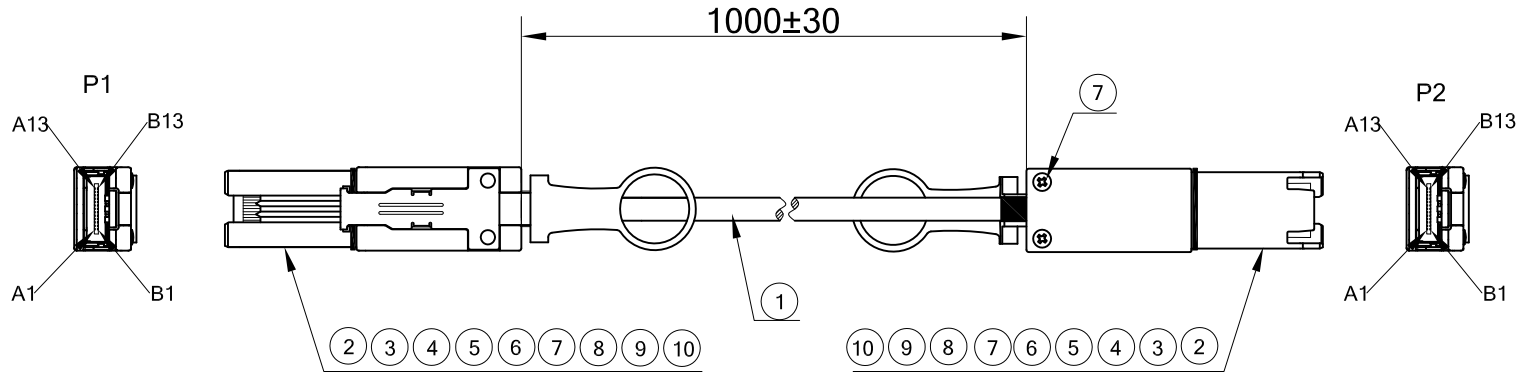

PIN ASSIGNMENT

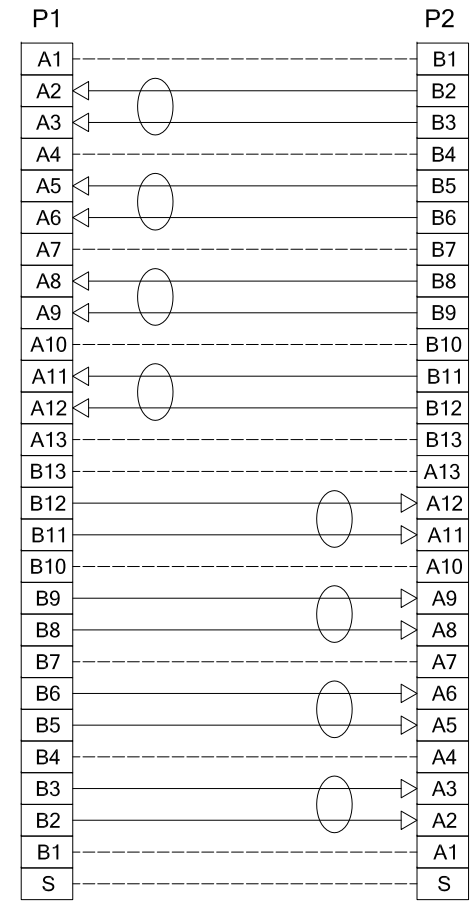

ELECTRICAL TEST:
 1.OPEN / SHORT 100% TEST.
 2.CONTACT RESISTANCE : 1Ω(MAX).
 3. INSULATION RESISTANCE : 20MΩ (MIN).
 4.HI-POT : DC 300V /10MS.

10	4-15-0001-200201	Heat shrink tube OD:0.6mm BLACK	3.0*16	mm
9	4-20-0063-001001	ACETATE TAPE W=10mm BLACK	180.0*2	mm
8	4-20-0002-051051	CONDUCTIVE COPPER FOIL W:5.0mm	50.0*2	mm
7	4-13-0032-M26551	SCREW M2*0.65 NICKEL PLATED	4	PCS
6	4-12-0016-000051	EXT.MINI SAS 26P CONDUCTIVE FOAM	2	PCS
5	3-02-0002-086701	TRL-THERMELT-867	15	g
4	2-70-0005-011551	EXT.MINI SAS 26P ZINE ALLOY BOTTOM SHELL NICKEL PLATED WITH LATCH	2	PCS
3	2-70-0002-011551	EXT.MINI SAS 26P ZINE ALLOY TOP SHELL NICKEL PLATED	2	PCS
2	2-70-0004-011551	EXT.MINI SAS 26P PCB (MINI SAS 4X)	2	PCS
1	1-67-0005-200201	UL20276 (28#/2C+D+A/M)*8P+AL.ML+Braid+PAPER+Jacket(COPARTNER)	1060.0	mm
NO.	PART NO.	DESCRIPTION	QTY	UNIT

©COPYRIGHT 1995 MAJESTIC TECHNOLOGY CORPORATION

TOLERANCES (EXCEPT TITLE BLOCK DATA AND UNLESS OTHERWISE SPECIFIED)	DRAWN BY WENDY LIU	DATE 11-08-17	
LINEAR ANGLES	CHECKED BY VINCENT HO	DATE 11-08-17	
ALL DIMENSION ARE IN	APPROVED BY DAVID HUANG	DATE 11-08-17	PART NAME: EXT.MINI SAS 26P CABLE 1M (MD-6706103)
THIRD ANGLE PROJECTION	DWG NO. 04-7022	REV. A0	
SIZE C	PART NO. 04-7022-05	SCALE: 1 : 1	SHEET: 1 OF 1