



| PART REV. | DWG. REV. | ECO# | ZONE | DESCRIPTION OF CHANGE | REV. BY | APPD | DATE |
|-----------|-----------|------|------|-----------------------|---------|-------|----------|
| A | A | | | CREATE FOR RFA J25 | WENDY | DAVID | 11-08-17 |

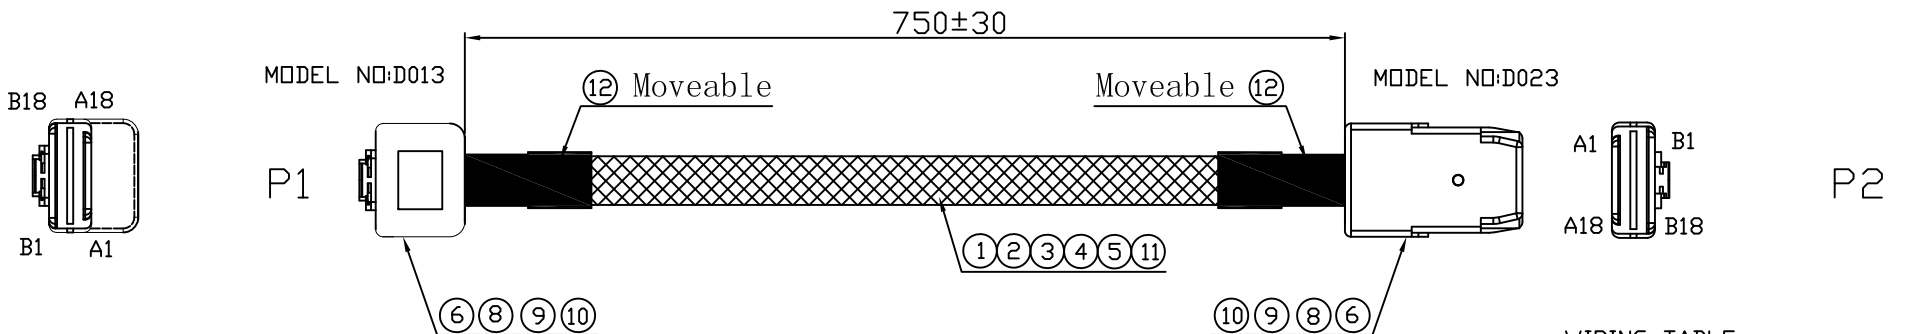

WIRING TABLE

| P1 | | | P2 | |
|------------|-----|-----|------------|-----|
| GND | A18 | --- | GND | B18 |
| RX3- | A17 | --- | TX3- | B17 |
| RX3+ | A16 | ○ | TX3+ | B16 |
| GND | A15 | --- | GND | B15 |
| RX2- | A14 | --- | TX2- | B14 |
| RX2+ | A13 | ○ | TX2+ | B13 |
| GND | A12 | --- | GND | B12 |
| SIDEBAND 6 | A11 | --- | SIDEBAND 6 | B11 |
| SIDEBAND 2 | A10 | --- | SIDEBAND 2 | B10 |
| SIDEBAND 1 | A9 | --- | SIDEBAND 1 | B9 |
| SIDEBAND 0 | A8 | --- | SIDEBAND 0 | B8 |
| GND | A7 | --- | GND | B7 |
| RX1- | A6 | --- | TX1- | B6 |
| RX1+ | A5 | ○ | TX1+ | B5 |
| GND | A4 | --- | GND | B4 |
| RX0- | A3 | --- | TX0- | B3 |
| RX0+ | A2 | ○ | TX0+ | B2 |
| GND | A1 | --- | GND | B1 |
| GND | B18 | --- | GND | A18 |
| TX3- | B17 | --- | RX3- | A17 |
| TX3+ | B16 | ○ | RX3+ | A16 |
| GND | B15 | --- | GND | A15 |
| TX2- | B14 | --- | RX2- | A14 |
| TX2+ | B13 | ○ | RX2+ | A13 |
| GND | B12 | --- | GND | A12 |
| SIDEBAND 5 | B11 | --- | SIDEBAND 5 | A11 |
| SIDEBAND 4 | B10 | --- | SIDEBAND 4 | A10 |
| SIDEBAND 3 | B9 | --- | SIDEBAND 3 | A9 |
| SIDEBAND 7 | B8 | --- | SIDEBAND 7 | A8 |
| GND | B7 | --- | GND | A7 |
| TX1- | B6 | --- | RX1- | A6 |
| TX1+ | B5 | ○ | RX1+ | A5 |
| GND | B4 | --- | GND | A4 |
| TX0- | B3 | --- | RX0- | A3 |
| TX0+ | B2 | ○ | RX0+ | A2 |
| GND | B1 | --- | GND | A1 |

Legend:
 ○ — ○ High-Speed Serial Differential Pairs
 --- Signal Return
 — Sideband Signal

TEST:
 1. OPEN / SHORT 100% TEST.
 2. CONTACT RESISTANCE : 1.0Ω (MAX).
 3. INSULATION RESISTANCE : 20MΩ (MIN).
 4. HI-POT : DC 300V / 0.01S.

| NO. | PART NO. | DESCRIPTION | Q'TY | UNIT |
|-----|------------------|---|-------|-------|
| 12 | 4-20-0062-002001 | ACETATE TAPE BLACK W=20mm | 50.0 | *2 mm |
| 11 | 4-15-0044-001001 | NYLON BRAID W=10.0mm BLACK <1*72> | 750.0 | mm |
| 10 | 2-61-A042-011501 | LATCH | 2 | pcs |
| 9 | 3-02-0002-086701 | TRL-THERMELT-867 | 6 | g |
| 8 | 3-03-0002-005001 | PP BK | 12 | g |
| 7 | 3-01-0004-003001 | PVC 30P BLACK (MINI SAS 36P Dustproof cover 2PCS) | 12 | g |
| 6 | 2-70-0001-011501 | MINI SAS 36P PCB | 2 | pcs |
| 5 | 1-58-0030 200209 | FLAT CABLE:30#*4C PH:0.8MM NO-UL GRAY | 785.0 | *2 mm |
| 4 | 1-61-0052-200251 | 2C*30#+2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE 04 (Non UL) | 780.0 | *2 mm |
| 3 | 1-61-0051-200251 | 2C*30#+2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE 03 (Non UL) | 780.0 | *2 mm |
| 2 | 1-61-0050-200251 | 2C*30#+2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE 02 (Non UL) | 780.0 | *2 mm |
| 1 | 1-61-0049-200251 | 2C*30#+2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE 01 (Non UL) | 780.0 | *2 mm |

©COPYRIGHT 1995 MAJESTIC TECHNOLOGY CORPORATION

| | | |
|---|-----------------------|--|
| TOLERANCES (EXCEPT TITLE BLOCK DATA AND UNLESS OTHERWISE SPECIFIED) | DATE | |
| X XX XXX | 11-08-17 | |
| DRAWN BY WENDY LIU | CHECKED BY VINCENT HO | COMMERCIAL & INDUSTRIAL DESIGN CO., INC. PART NAME: MINI SAS 36P 90° TO 180° CABL 750mm (MD-6706106) |
| DATE 11-08-17 | DATE 11-08-17 | |
| APPROVED BY DAVID HUANG | DATE 11-08-17 | SCALE: 1 : 1 SHEET: 1 OF 1 |
| DWG NO: 04-7088 | REV. A0 | |