iStoragePro™

POCKET VIEW HARD DRIVE INSTALLATION INSTRUCTION		
DESCRIPTION: iT2PKTV00T	Page 1 of 2	REV. A

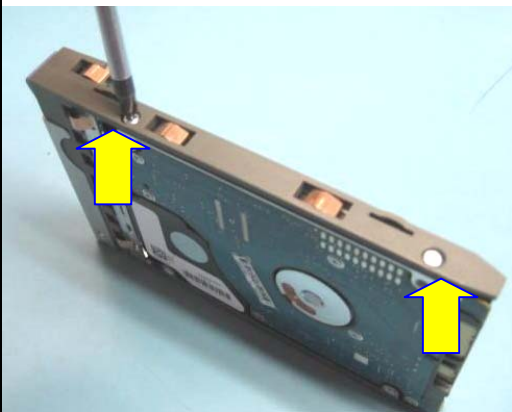|	
	1) Pocket View Package
	2) Open box and to check accessories. Top compartment will carry: a. – Product information card. b. – White box with accessories. c. – Enclosure.
	3) White accessory box. a. – Universal AC adapter. b. – Screw-set (use to install hard disk) c. – eSATA-eSATA cable. d. – Fire Wire 400-800 cable. e. – Fire Wire 800-800 cable. f. – USB 2.0- mini USB cable g. – Product information CD.

|	
	4) Take enclosure out from plastic bag and remove drive trays by pushing the blue eject button towards the right.
	5) Install hard disk drive to drive trays using screws in accessory box.
	6) Install hard disks to the unit.
	7) Before plug in Pocket View to your system, please follow the next page to complete the RAID set up then it's all good to go.

iStoragePro™ **RAID Setup Guide**

Pocket View

Dock View

RAID MODE	1	2
RAID 1	off	off
RAID 0 Strip	off	on
RAID 0 Span	on	off

By default, the system is set to RAID 1 Mirroring.

To change to RAID 0, please do the following:

1. Change the RAID setup to RAID 0 by toggling the switches at the back of the unit. Refer to the table on the left.

2. Restart the machine. As the machine powers up, press the Re-Init button (Left Arrow) on the LCD Display.

3. After the disk initialization is complete, you will be prompted to confirm your RAID mode change to RAID 0. Press the Re-Init button again to confirm.

4. Once the display shows "Active," you may connect the system to your host computer.

*Please note: Changing the RAID mode will erase your data. Please back up your data properly before setup.

iStoragePro™

20 Odyssey, Irvine, CA, USA | 1 800 272 0062 | info@iStoragePro.com